

HS-60W



CASE: P16-12 111×78×36mm

terminal 5x8.8mm

L , N : AC



:

-V : DC



+V : DC

AC input voltage range	170-364VAC 47-63Hz 240-370VDC
Input current	0.9A/230V
AC inrush current	Cold-start current 36A/230V
Leakage current	<2mA/240VAC
DC adjustable range	±10% rated output voltage
Over load protection	105-150% hiccup mode, auto-recovery
Over-voltage protection	
Setup rise hold up time	200ms 100ms 20ms
Withstand voltage	I/P-O/P: 1.5KVAC 1minute I/P-FG: 1.5KVAC 1minute O/P-O/P: 0.5KVAC 1minute
Working temperature	-10 ~ +60 .20%-90% RH
Weight/packing	0.27kg.50pcs/13.5kg


型号type	输出Output	差值Error	范围Range	效率Efficiency
HS-60-12	12V , 0-5A	±1%	100mV	78%
HS-60-15	15V , 0-4A	±1%	100mV	78%
HS-60-24	24V , 0-2.5A	±1%	100mV	82%

NOTE:	<ol style="list-style-type: none">1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 of ambient temperature.2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.3. Tolerance : includes set up tolerance, line regulation and load regulation.4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.5. If the power supply is short-circuited under no load, it will recover automatically when short-circuit is removed.
-------	--

Mechanical Specification

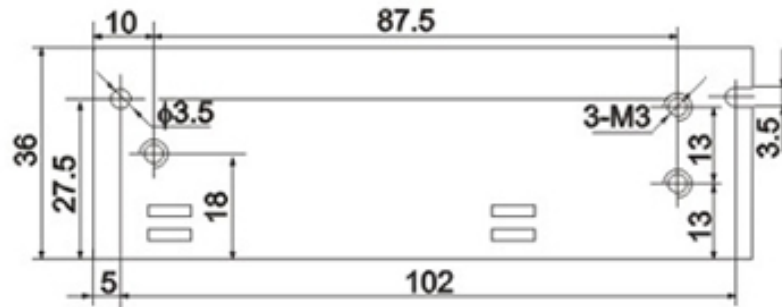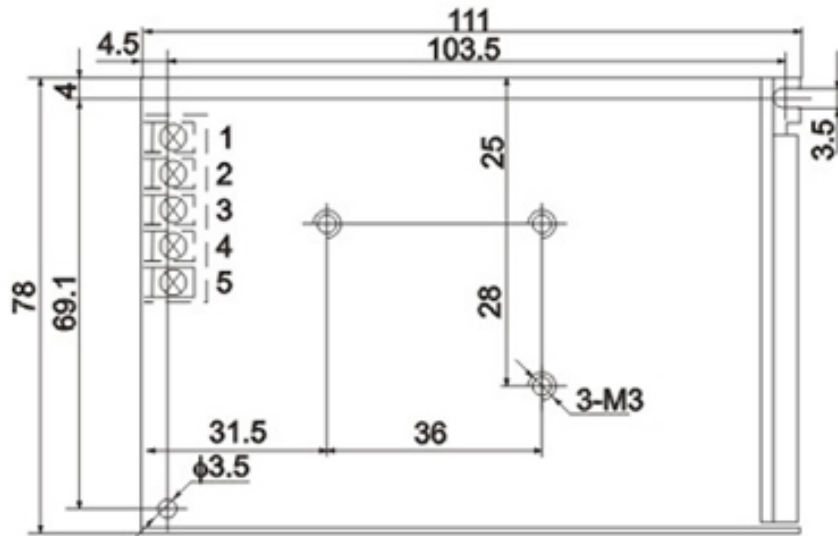

Derating Curve

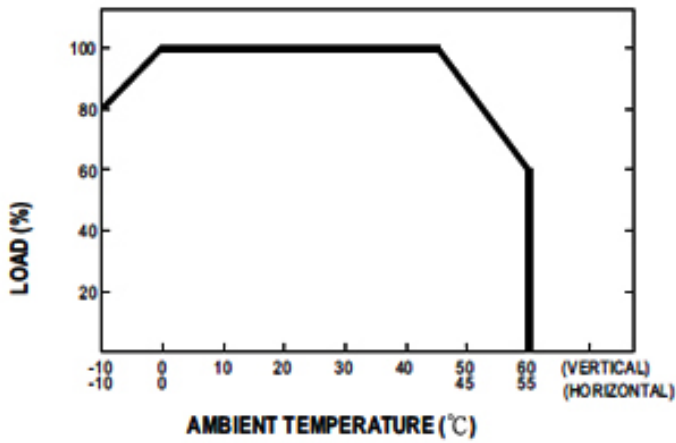

Static Characteristics (24V)

