


SPEAKER SPECIFICATION

顾客 CUSTOMER				出图承认 APPROVAL
型号 MODEL NO.	顾客型号 CUSTOMER NO.			
	本厂型号 OUR NO.	Q1032-34		
口径 SIZE	Φ125MM		总高 TOTAL HEIGHT	70 MM
磁钢尺寸/重量 MAGNET SIZE/WEIGHT	Φ72*Φ32*10H MM 5.6 OZ		磁钢材料 MAGNET MATERIAL	铁氧体 <input checked="" type="checkbox"/> 钕铁硼 <input type="checkbox"/> FERRITE ND
音圈规格 V.C. SPEC	Φ19.45 MM 0.8 INCH		音圈材料 V.C. MATERIAL	KSV
重量 WEIGHT	620 GM			
编号 NO. :	项目 ITEM	规格 SPECIFICATION		测试条件 TEST CONDITON
1	音圈阻抗 VOICE COIL IMP.	4 OHM ±15%		AT 1000 HZ
2	最低共振周波数 RESONANT FREQ. FO	107 HZ ±15%		WITHOUT BAFFLE
3	出力音压 OUTPUT S. P. L.	88 ±3DB 1W 1M		AVERAGE
4	输入功率 INPUT POWER	额定入力 RATED POWER INPUT 15W		最大入力 MAX. POWER INPUT 30 W
5	实效周波数带域 FREQ. RESPONSE	FO— 20K HZ		OUTPUT S. P. L ± 10 DB
6	动作 OPERATION	MUST BE NORMAL		PROGRAM/SOURCE 15 W
7	异常音 BUZZES & RATTLES	MUST BE NORMAL		SIN WAVE 15 W
8	寿命试验 W/HR REALIABILITY TEST	白色噪音 WHITE NOISE 22.5 W		24 HR
9	温度测试 TEMPERATURE TEST	/°C		/ HR
10	湿度测试 HUMIDITY TEST	/°C / %		/ HR

Impedance vs Freq

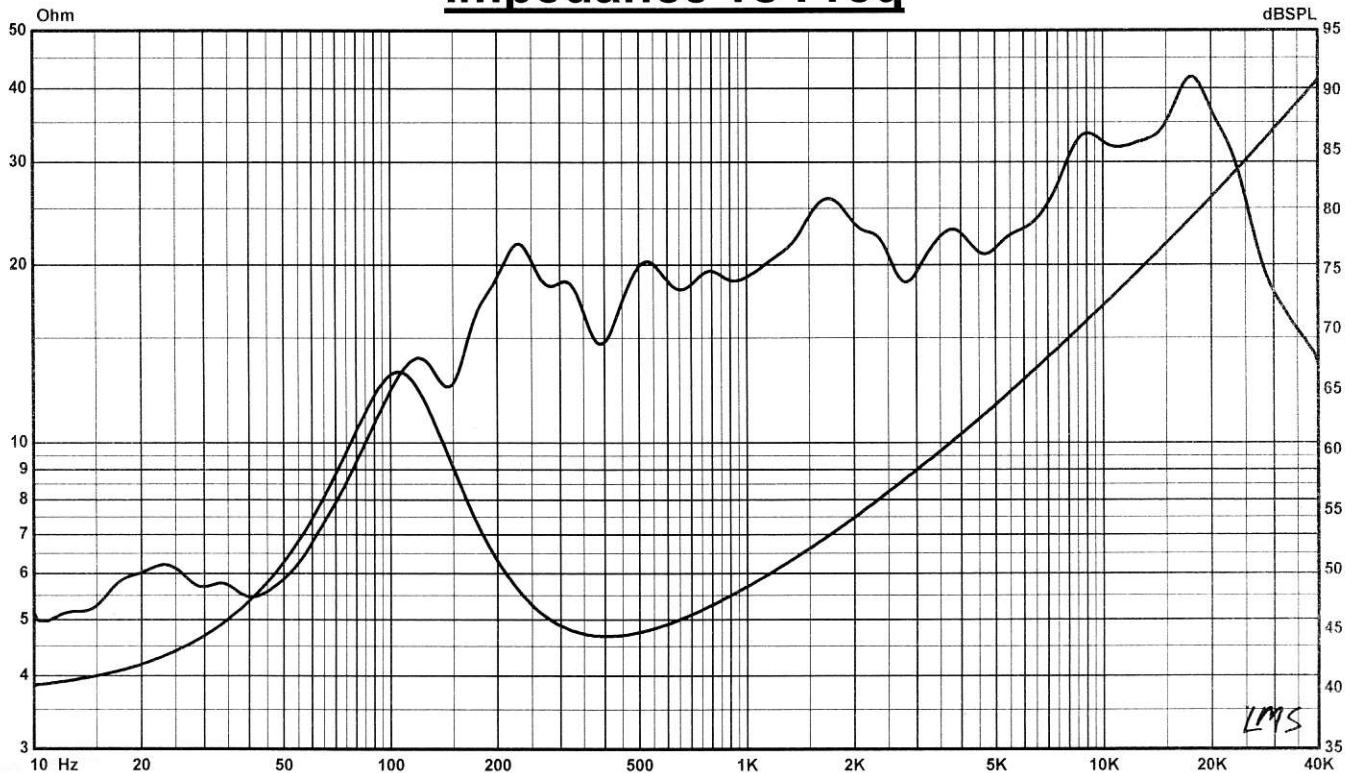

Map

— 68: Q1032-34

Notes

Revc=3.700 Ohm Fo=106.945 Hz Sd=8.659m M Md=10.500 g
 BL=6.815 T 階 Qms= 1.521 Qes= 0.612 Qts= 0.436 No= 0.399 % SPLo= 88.0 dB
 Vas=2.064m M Cms=193.822u M/N Krm=928.847u Ohm Erm=0.839
 Mms=11.427 g Mmd=10.500m Kg Kxm=28.209m H Exm=0.535

LMS

4.5.0.331
二月-12-2003

Person:
Company:

Project:
File: 07.1.3.lib

Mar 1, 2007
Thr 9:42 am

LINEAR X
S Y S T E M S