

Performance


- Adopting LONGi HPBC solar cells with zero-busbar, offering a sleek appearance and higher efficiency.
- Stable output in low light and partial shade conditions.
- Intergraded bypass diodes for each cell is not only fireproof ensuring the continuous output even part of the cells are damaged.
- Original module technology increased the efficiency by 3% compared to traditional full black modules.
- Ideal for RVs, yacht, balcony and BIPV applications.

Manufacturing

- El-Testing before packing
- Comprehensive module power testing

Warranty

- 2 years warranty

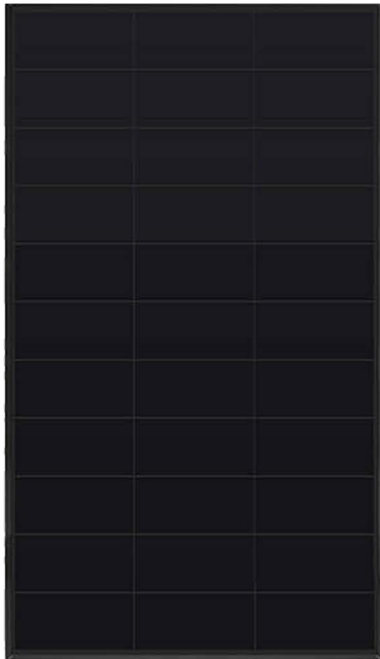

Electrical Parameters (Standard Test Conditions AM=1.5, E=1000W/m ² , TC=25°C)	
Nominal Power	120W
Cell Type	LONGi HPBC Mono-crystalline
Cell Efficiency	>25%
Maximum Power Current (Impp)	5.73A
Maximum Power Voltage (Vmpp)	20.96V
Open-circuit Voltage (Voc)	23.93V
Short-circuit Current (Isc)	6.08A
Operating Parameters	
Operating temperature range	-40°C ~ +85°C
Output Tolerance	0~+3%
Max. System Voltage	500V
Max. Series Fuse Rating	15A
Mechanical Parameters	
Junction box rating	IP67
Output Cable	700mm/2.5mm ² /MC4
Frame	Anodized aluminum alloy frame
Glass	Single glass, 3.2mm coated tempered glass
Diode	√
Packaging	
Module Dimensions	1050*580*30mm
Module Weight	6.4/7.3kg
Package	Single Package
Pieces per Pallet	30 pcs
Gross Weight per Pallet	245kg
Pallet Dimensions	1200*1000*750mm

SOLMAX NEW ENERGY B.V.

Address: defensiedok 18, 3433 KL Nieuwegein, Utrecht ,NL
 TEL:0031-307855708
 Whatsapp:031-620074476
 Email:info@solarfam.nl

