


Specifications

ModelNO .		JTX7A-BS
Nominal Voltage		12V
RatedCapacity(10 hours rate)		7.0Ah
Dimensions	Length	151mm (5.94 inches)
	Width	87mm (3.42 inches)
	Height	95mm (3.74 inches)
	TotalHeight	95mm (3.74 inches)
Approx. Weight		2.43kg (5.35 Lbs) ± 3%
ChargeCurrent (A)	0.7 A (14.4V constant voltage charge)	



Dimensions

Unit: mm

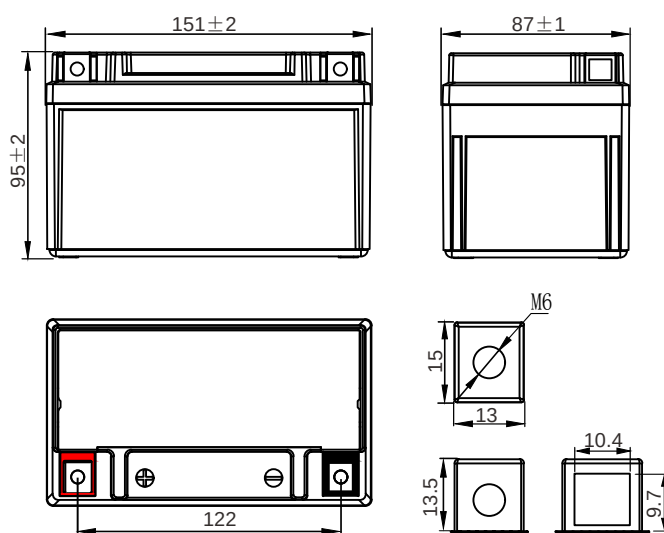

Characteristics

Capacity 25°C (77°F)	10 hours rate (0.7A to 10.5V)	7.0Ah
	5 hours rate (1.19A to 10.2V)	5.95Ah
	1C (7.0A to 9.60V)	3.15Ah
	3C (21A to 9.60V)	2.45Ah
Cranking Amperes (by Midtronic Tester)		210A
Cold Cranking Amperes (-18°C SAE Standard)		105A
Cold Cranking Amperes (-18°C EN Standard)		105A
Internal Resistance (at 1KHz)		Approx. 12.5 (mΩ / 25°C $\pm$ 15%)
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-30°C (-22°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	60% depth of discharge 250 cycles	
	30% depth of discharge 400 cycles	
Charge Retention (self-discharge life) at 20°C (68°F)	1 month	97%
	3 month	90%
	6 month	80%
Warranty	1 year	
Case Material	ABS	

Discharge Time VS. Discharge Current (25°C)

