

Specifications


ModelNO .	JTX9-BS	
Nominal Voltage	12V	
RatedCapacity(10 hours rate)	9Ah	
Dimensions	Length	151mm (5.94 inches)
	Width	87mm (3.42 inches)
	Height	106mm (4.17 inches)
	TotalHeight	106mm (4.17 inches)
Approx. Weight	2.97kg (6.54 Lbs) $\pm$ 3%	
ChargeCurrent(A)	0.9 A (14.4V constant voltage charge)	

Characteristics

Capacity25°C (77°F)	10hours rate(0.9A to 10.5V)	9.0Ah
	5hours rate(1.53A to 10.2V)	7.65Ah
	1C (9.0A to 9.60V)	4.05Ah
	3C (27.0A to 9.60V)	3.15Ah
Cranking Amperes(by Midtronic Tester)		240A
Cold Cranking Amperes(-18°C SAE Standard)		135A
Cold Cranking Amperes(-18°C EN Standard)		135A
Internal Resistance(at 1KHz)		Approx.11.5(m Ω /25°C $\pm$ 15%)
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-30°C (-22°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
LifeExpectancy (Cycle Use)	60% depth of discharge 250 cycles	
	30% depth of discharge 400 cycles	
ChargeRetention (self-discharge life) at 20°C (68°F)	1 month	97%
	3 month	90%
	6 month	80%
Warranty	1 year	
CaseMaterial	ABS	



Dimensions

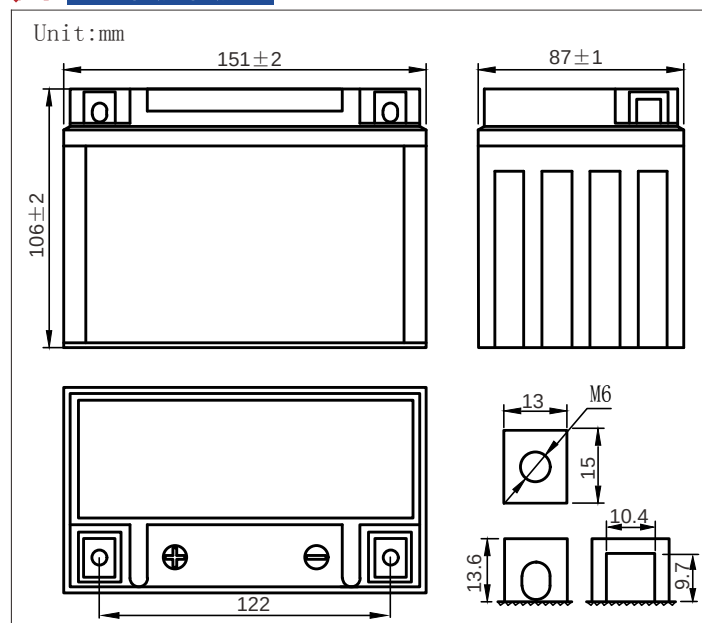

Discharge Time VS. Discharge Current (25°C)

