

### DZ47-63(C45N) series Mini Circuit Breaker



DZ47-63 1P



DZ47-63 2P



DZ47-63 3P



DZ47-63 4P


#### APPLICATION

DZ47-63 series circuit breaker is used in lighting distribution system or motor distribution system for protecting overload and short-circuit in the system. The product is novel in structure, light in weight, reliable and excellent in performance. It has high breaking capacity, can trip quickly and its installation uses with guide, its case and body are adopted with high fire-resistant and shockproof plastics. The product, with long life, is mainly used in AC 50Hz/60Hz single-pole 240V or two, three, four-pole 415V circuit for overload and short-circuit protection as well as for unfrequent on-and-off switching electric equipment and lighting circuit in normal case. This product conform to GB10963, IEC60898 BS3871.

#### SPECIFICATIONS

Rated temperature (°C)	40			
Rated voltage (V) AC	240/415			
Rated current (A)	B	1,3,5,6,10,15,16,20,25,32,40,50,60,63		
	C	1,3,5,6,10,15,16,20,25,32,40,50,63		
Electric endurance not lower than (times)	6000			
Mechanical endurance lower than (times)	2000			
Tropical test	2 kinds			
Weight(g)	1P	2P	3P	4P
	102	208	308	408

#### CHARACTERISTIC CURVE

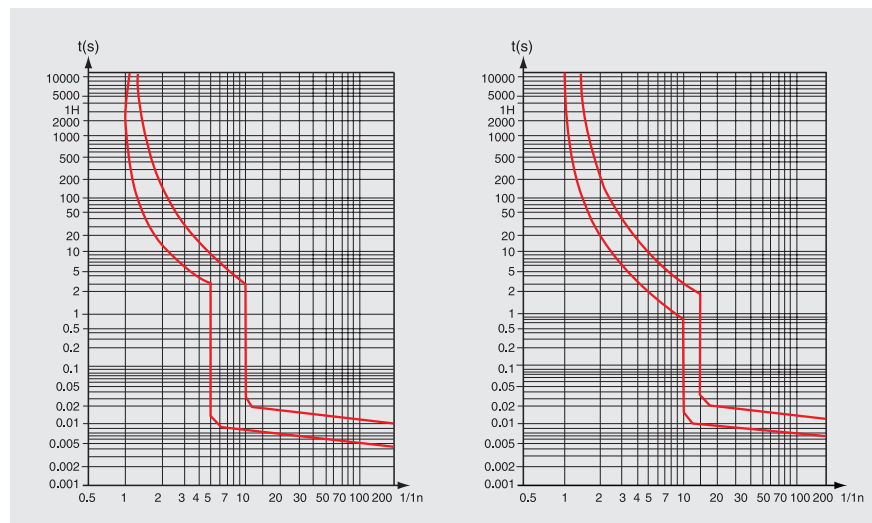

#### DIMENSIONS

