


PV Switch-disconnector Instructions

Parameter


According to	IEC60947-3、AS60947.3
Utilization Category	DC-PV1; DC-PV2
Pole	4P
Rated Operational Voltage (U_e)	600V / 800V / 1000V/1200V
Rated Insulation Voltage (U_i)	1200V
Conventional Thermal Current (I_{th})	8A....32A
Rated Impulsed Withstand Voltage (U_{imp})	8kV
Mechanical Life	≥15000
Electric Life	≥300
Ingress Protection	IP20
No Polarity Vertically \updownarrow	

4P 4-Pole	4T 4-Pole With Input And Output Top	4B 4-Pole With Input And Output Bottom	4S 4-Pole With Input On Top Output Bottom
---------------------	--	---	--



Contacts Wiring Graph

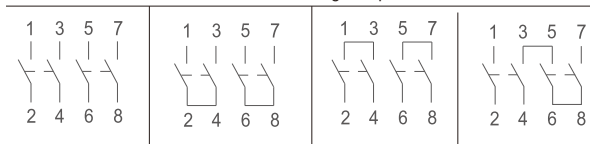

Switching Examples


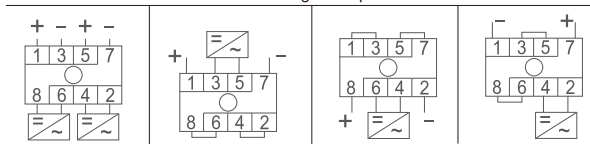


Installation



DIN Rail Mounting

IEC/EN 60715 <1.37in/35mm>

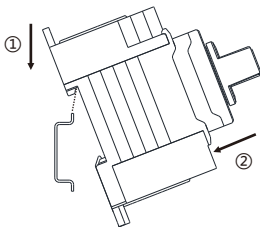

In the "OFF" state, you can use the padlock to lock out.

