



【Product Name】 : Universal Wire Connector (3-Position)

【Product Model】 : PCT-213(222-413)

【Electrical Performance】 : Rated Voltage: 250V/4KV

Rated Current: 32A

【Product Material】 : Contacts: Tin-plated copper

Insulation: Modified Nylon 66

【Applicable Wires】 : Single-strand hard wire 0.8-2.5mm²

Multi-strand soft wire 0.8-4.0mm²

Stripping Length: 10mm


【Product Dimensions】 : 17.0 (L) x 20.5 (W) x 14.5 (H)

适用线缆


适用各种不同型号线缆

Many different models are available for different cables


单股硬线 (BV)
0.08-4.0mm²

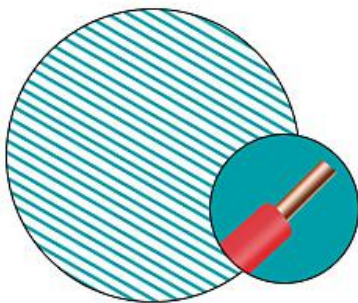

多股硬线 (BVR)
0.08-4.0mm²

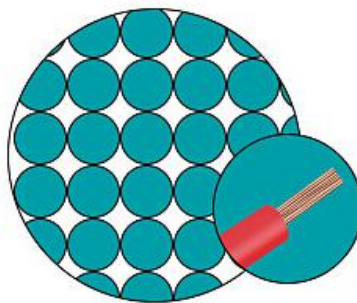

多股软线 (RV)
0.08-2.5mm²

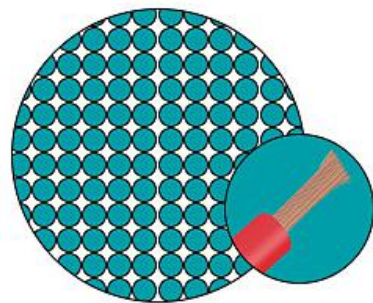

接线助推键

闭合牢牢固定电线
Close tightly to the wire

安全测电孔

可用电笔测试是否带电
The electric pen test can be charged



快速进线孔

可插硬软线，便捷安装
Can insert hard cord, easy installation

PC绝缘阻燃

寿命长、耐腐蚀、抗老化、耐高温

Long life, corrosion resistance and aging resistance
High temperature resistance

接线端子 使用说明

INSTRUCTIONS FOR WIRING TERMINALS

连接器
使用说明

UTL®

THE CONNECTOR DIRECTIONS FOR USE



1 按标定长度剥去导线外皮



2 掰开橙色手柄直至直立状
在相应的进线口插入导线



3 按下橙色手柄，导线
即可接好

- 1.Strip the outer sheath of the wire according to the specified length.
- 2.Pry open the orange handle until it stands upright.
Insert the wire into the corresponding inlet.
- 3.Press the orange handle to connect the wires.