

INTERRUTTORI A BASCULA E PULSANTI

Rocker switches and push-buttons | *Interrupteurs à bascule et poussoirs*



INTERRUTTORI BIPOLARI

Double pole switches | *Interrupteurs bipolaires*

Tensione	Voltage	Tension
250 V	250 V	250 V
Corrente	Current	Courant
10 A resistivi	10 A resistive	10 A résistifs
Contacti	Contacts	Contacts
Ottone argentato faston 4,8 mm	Silver-plated brass faston 4,8 mm	Laiton argenté faston 4,8 mm
Corpo	Body	Corps
Policarbonato nero	Black polycarbonate	Polycarbonate noir
Cicli di lavoro	Operating cycles	Durée de vie
300.000	300.000	300.000 cycles
Temperatura	Temperature	Température
125°C	125°C	125°C




Codice	Circuito	Colore bascula
Code	Circuit	Rocker colour
Code	Circuit	Couleur bascule
I3910	on - off	■
I3913	on - off	■ neon
I3915	on - off	■ neon

Accessorio | Accessory | Accessoire

PG3901 calotta di protezione IP55/PG3901 protection cover IP55/PG3901 capot de protection IP55

Dimensioni | Dimensions | Dimensions

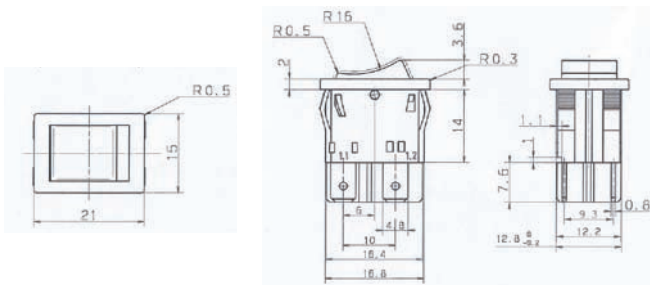


grado di protezione 40 IP
sealing IP 40
indice de protection IP 40

cava pannello 19x13 mm
panel cut-out 19x13 mm
découpe du panneau 19x13 mm

100 pz
100 pcs
100 pces

pronta
in stock
en stock

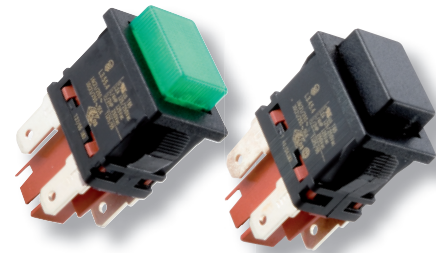

INTERRUTTORI / PULSANTI BIPOLARI

Double pole switches/Momentary switches | *Interrupteurs/poussoirs bipolaires*

Tensione	Voltage	Tension
250 V	250 V	250 V
Corrente	Current	Courant
16 A resistivi/6 A induttivi	16 A resistive/6 A inductive	16 A résistifs/6 A inductifs
Contacti	Contacts	Contacts
Ottone argentato faston 4,8 mm	Silver-plated brass faston 4,8 mm	Laiton argenté faston 4,8 mm
Corpo	Body	Corps
Policarbonato nero	Black polycarbonate	Polycarbonate noir
Cicli di lavoro	Operating cycles	Durée de vie
10.000	10.000	10.000 cycles
Temperatura	Temperature	Température
125°C	125°C	125°C




Codice	Circuito	Colore bascula
Code	Circuit	Rocker colour
Code	Circuit	Couleur bascule
I3950	on - off	■
I3953	on - of	■ neon
I3955	on - off	■ neon
I3952	on - off	■ neon
I3921	on - mom	■

Accessorio | Accessory | Accessoire

PG3900 calotta di protezione IP64/protection cover IP64/capot de protection IP64

Dimensioni | Dimensions | Dimensions

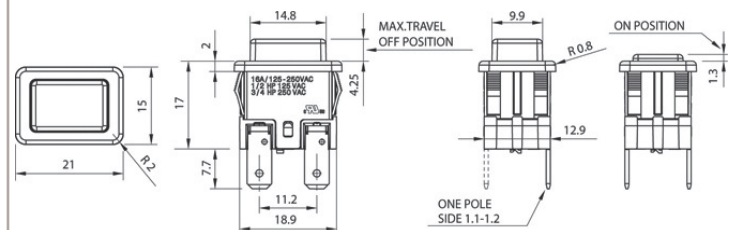

grado di protezione 40 IP
sealing IP 40
indice de protection IP 40

cava pannello 19x13 mm
panel cut-out 19x13 mm
découpe du panneau 19x13 mm

100 pz
100 pcs
100 pces

pronta
in stock
en stock