

# AGM Start-Stop Battery Specification


## L3 AGM Battery 12V 70AH



### Product Image




### Overall Dimensions

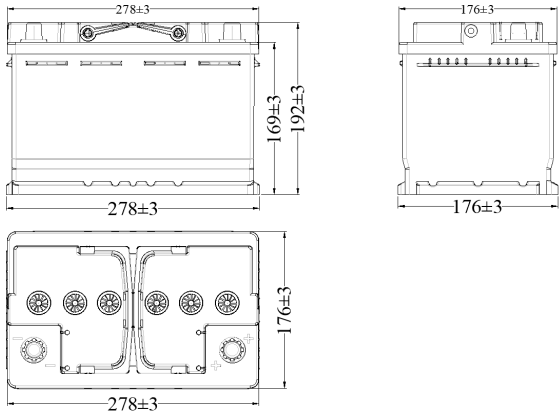

### Parameters

|                                    |                  |             |
|------------------------------------|------------------|-------------|
| Voltage(V)                         |                  | 12          |
| Weight/±3%kg                       |                  | 20.5        |
| Rated capacity(AH)                 |                  | 70          |
| Reserve capacity(min)              |                  | 100         |
| Low Temp Cranking Amps @ -18°C (A) |                  | 650         |
| Size                               | Length(mm)       | 278         |
|                                    | Width(mm)        | 176         |
|                                    | Height(mm)       | 192         |
|                                    | Total height(mm) | 192         |
| CCA                                |                  | 720         |
| Temperature                        | Discharge(°C)    | -40 ~ +60   |
|                                    | Charge(°C)       | -40 ~ +60   |
|                                    | Storage(°C)      | -40 ~ +60   |
| Optimal temperature(°C)            |                  | +10 ~ +30   |
| CC charging current(A)             |                  | 7           |
| CV charging(V)                     |                  | 13.5 ~ 13.8 |
| Max charging current(A)            |                  | 21          |
| Case Material                      |                  | PP          |

### Terminal Dimensions

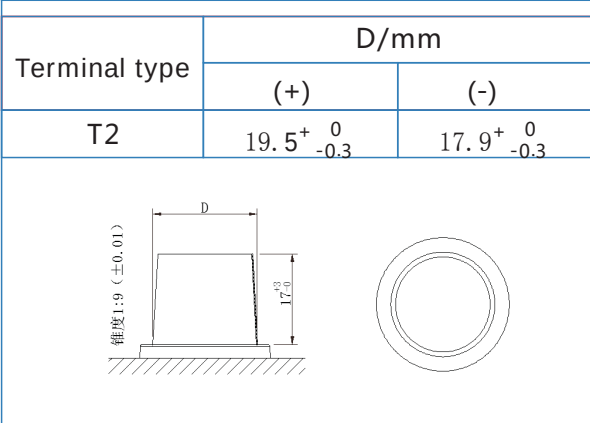

### Discharge curve/25°C

